



- NOTES:
1. DO NOT SCALE DRAWING.
 2. DIMENSIONS ARE IN INCHES [mm].
 3. LHR DOOR SHOWN.
 4. MINIMUM STILE WIDTH: SEE CHART.
 5. IF REQUIRED: THRU-BOLT HOLE SIZE
 9/32" INTERIOR DOOR FACE
 3/8" EXTERIOR DOOR FACE
 6. IF OUTSIDE TRIM IS REQUIRED, REFER
 TO OUTSIDE TRIM TEMPLATE.

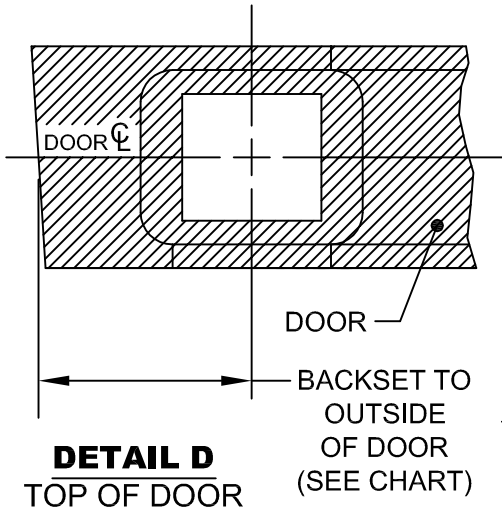

BACKSET	MINIMUM STILE
2-1/4" (57.2)	4-1/2 (114)

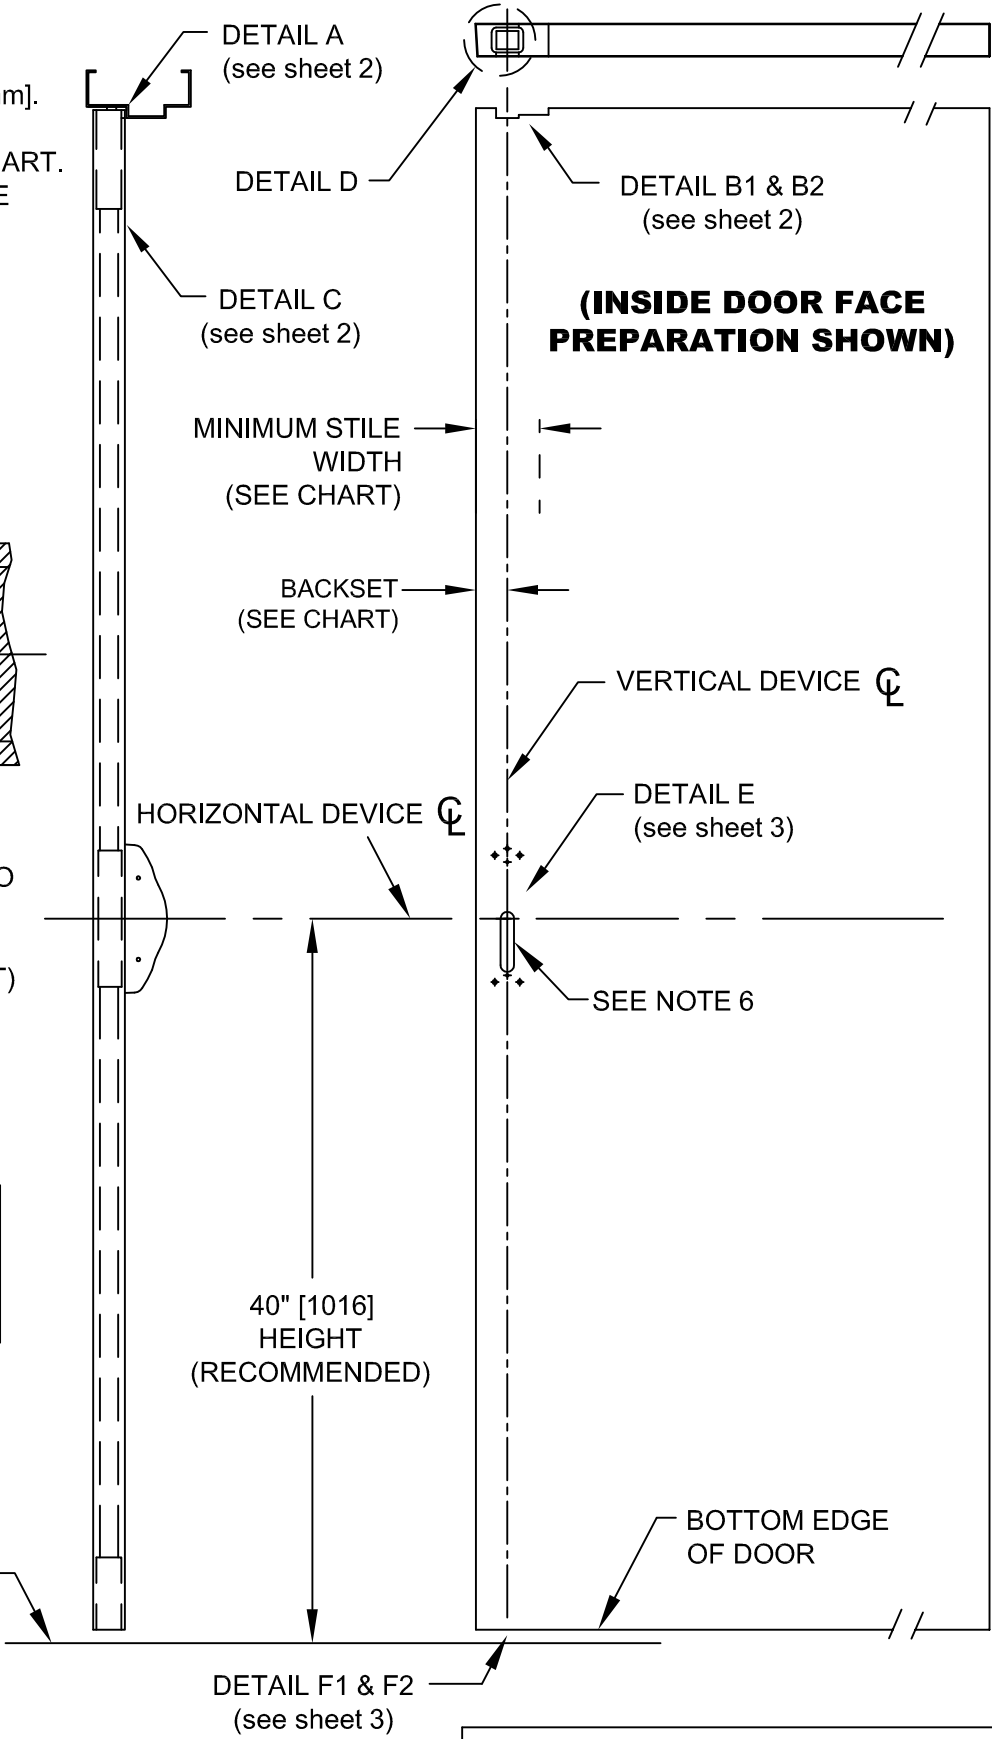

HDG. _____ DR. _____ SHEET 1 OF 4

RESPONSIBILITY


Door and Frame Manufacturers are responsible for providing adequate construction or reinforcements for proper installation of hardware shown. All architectural builders hardware must be installed on properly reinforced doors and frames regardless of the type, material or method of construction.

TEMPLATE
WOOD DOOR
70 TOP & BOTTOM LATCHING
CONCEALED VERTICAL ROD
EXIT DEVICE


DO NOT SCALE DRAWING

DATE12-8-16


TEMPLATE NUMBERT2330

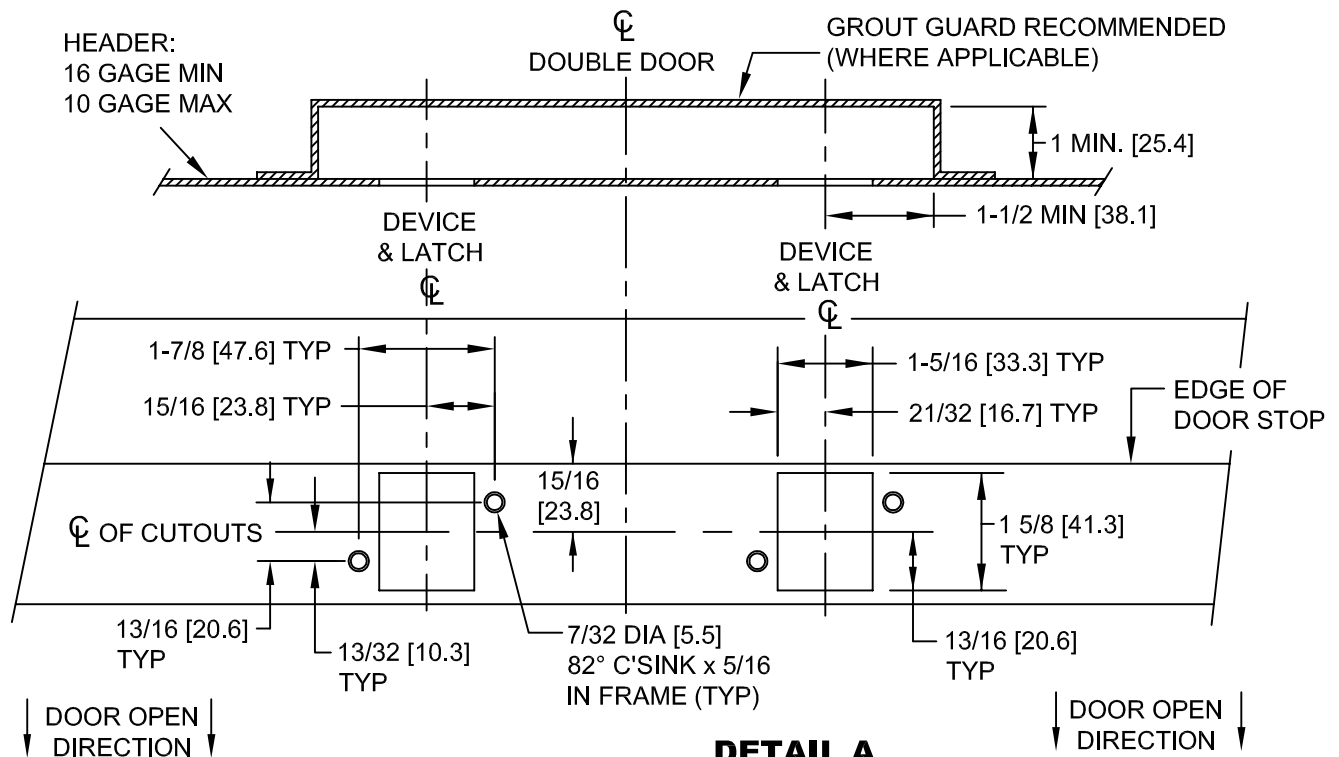


DETAIL A
TOP FRAME STRIKE PREP
LOOKING UP AT HEADER

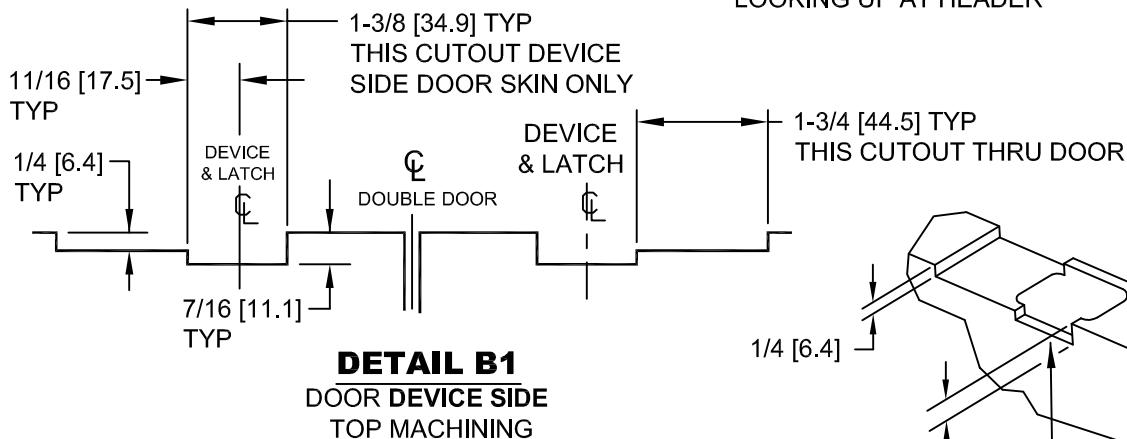

DETAIL B1
DOOR DEVICE SIDE
TOP MACHINING

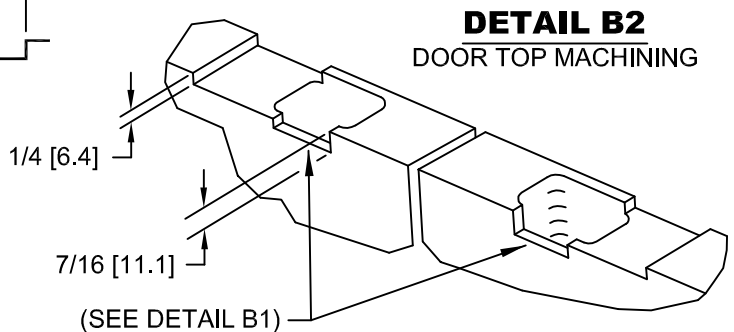


DETAIL B2
DOOR TOP MACHINING

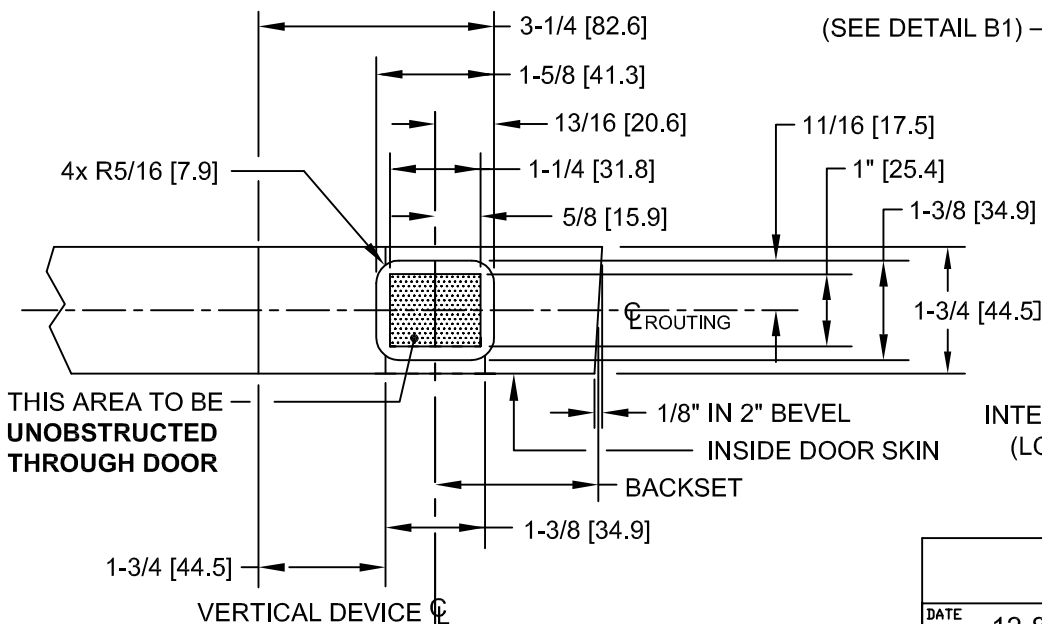


DETAIL C
INTERNAL MECHANISM CLEARANCE
(LOOKING FROM TOP OF DOOR)

TEMPLATE - 70 DEVICE
SHEET 2 OF 4


DATE	12-8-16	TEMPLATE NUMBER	T2330
------	---------	-----------------	-------

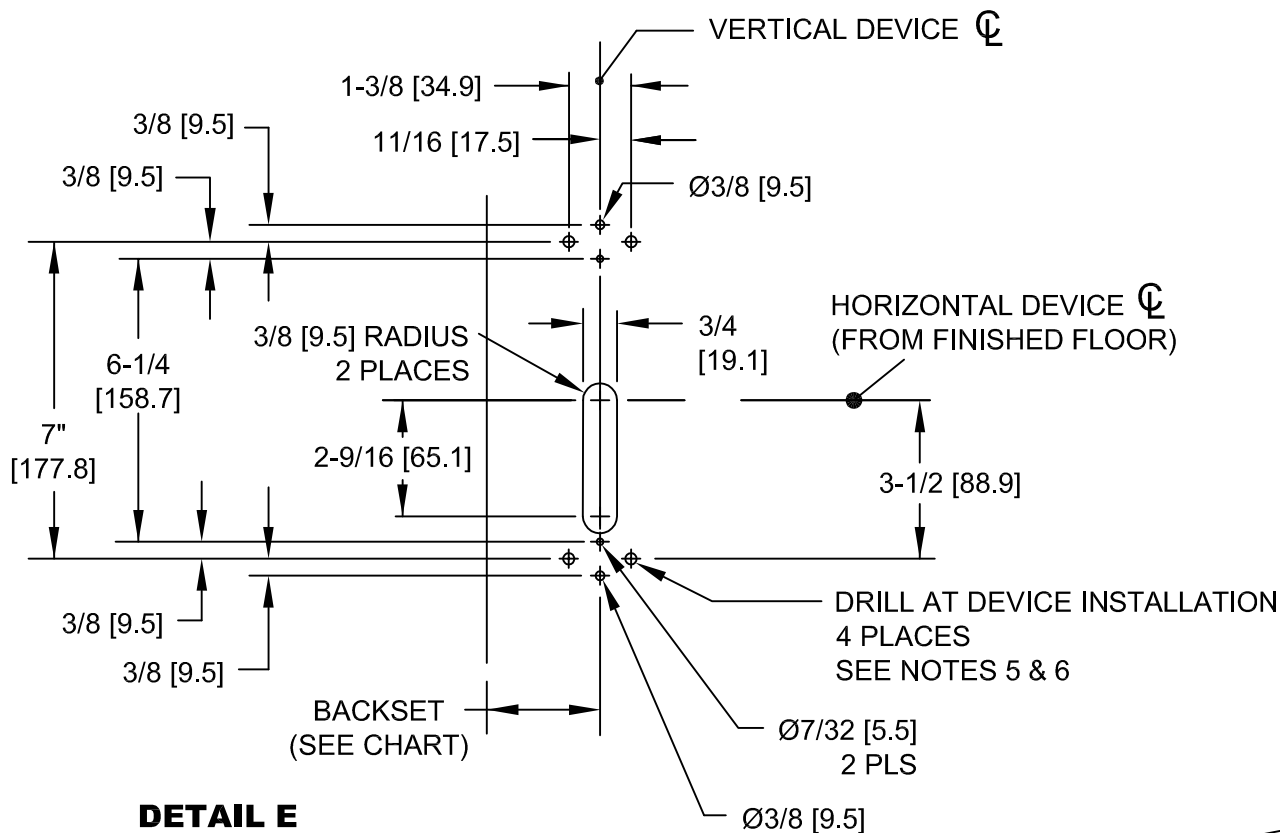

DETAIL E
DEVICE SIDE MACHINING
(INSIDE DOOR FACE ONLY)

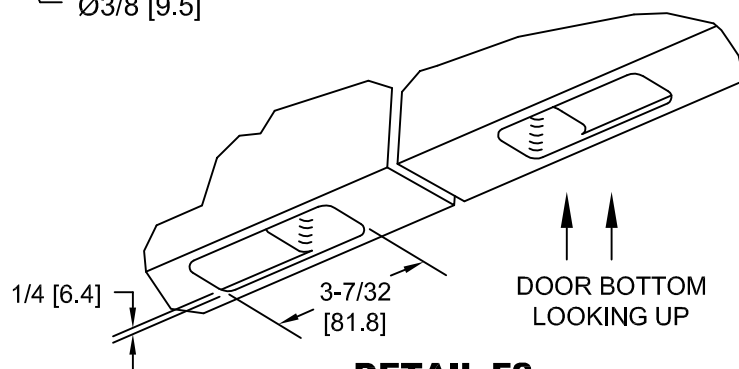

DETAIL F2
DOOR BOTTOM MACHINING

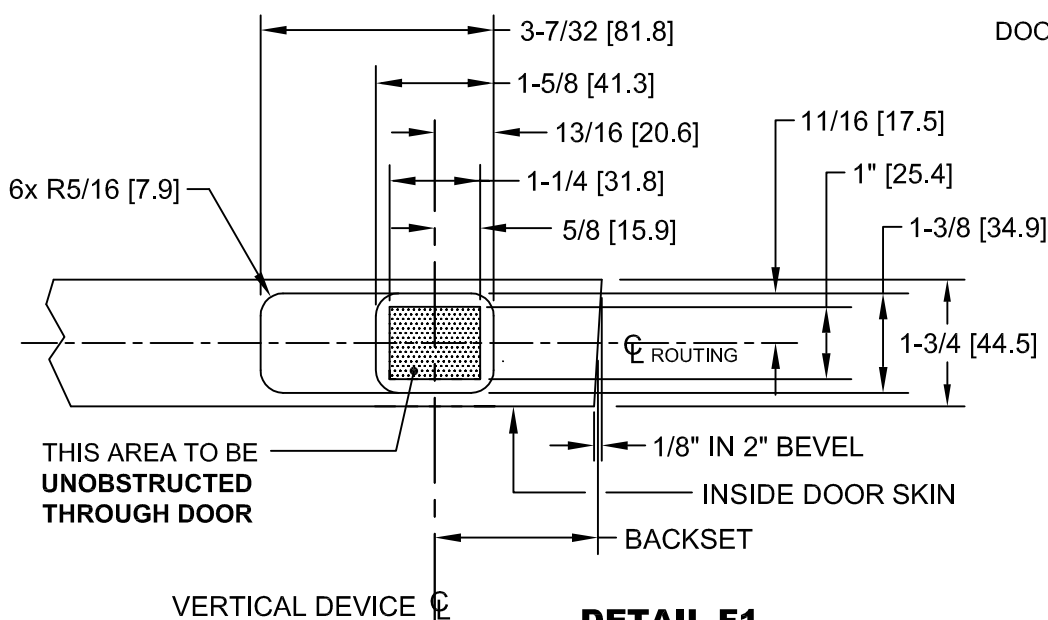


DETAIL F1
INTERNAL MECHANISM CLEARANCE
(LOOKING FROM BOTTOM OF DOOR)



TEMPLATE - 70 DEVICE
SHEET 3 OF 4

DATE 12-8-16

TEMPLATE NUMBER T2330

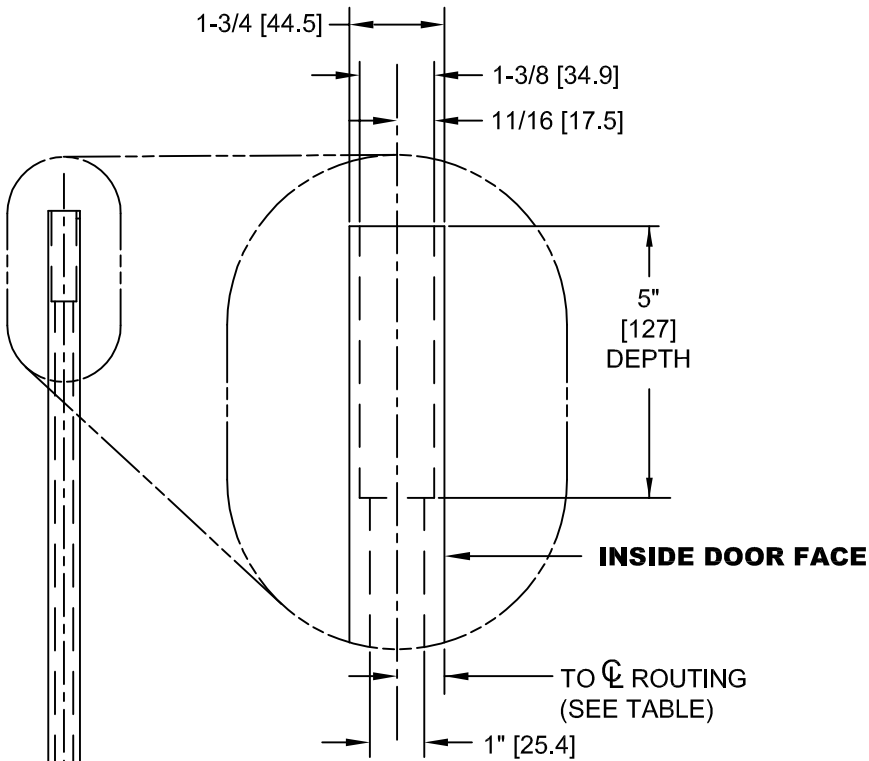

DOOR THICKNESS	☒ ROUTING
1-3/4 [44.5]	7/8 [22.2]
2" [50.8] OR MORE	1" [25.4]

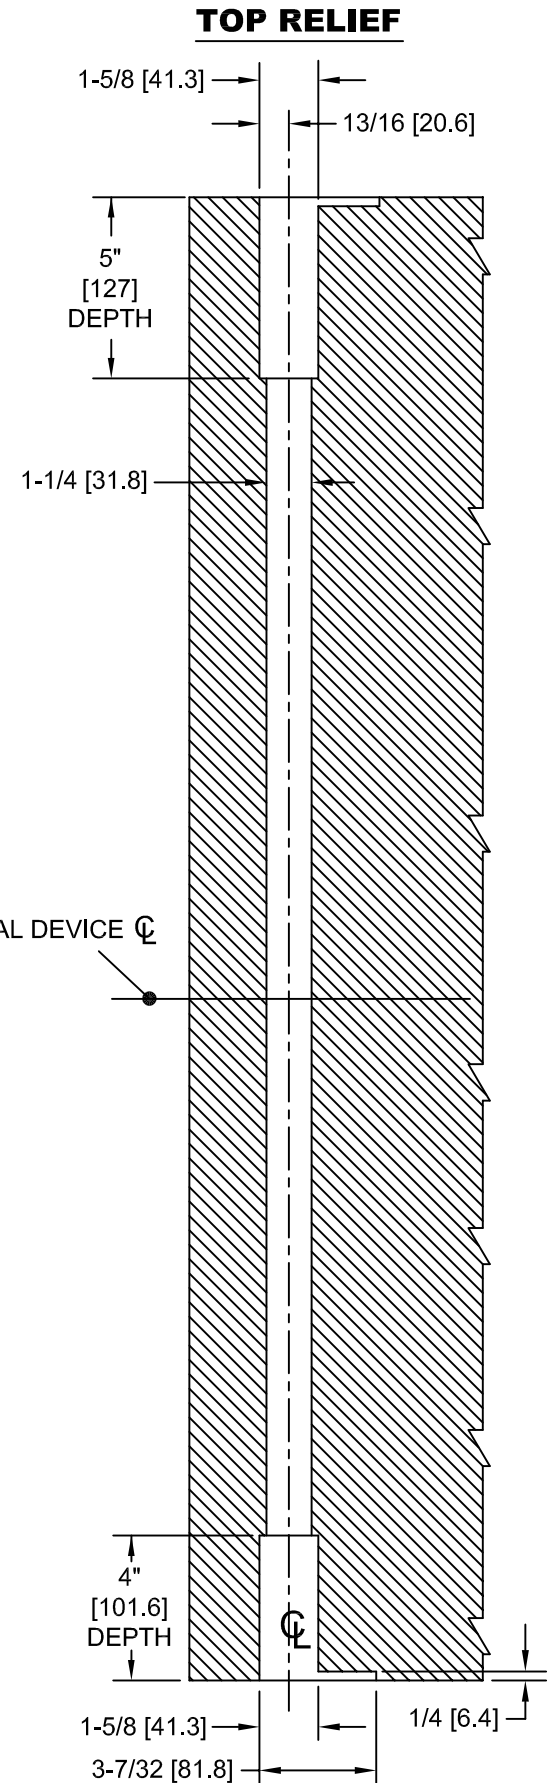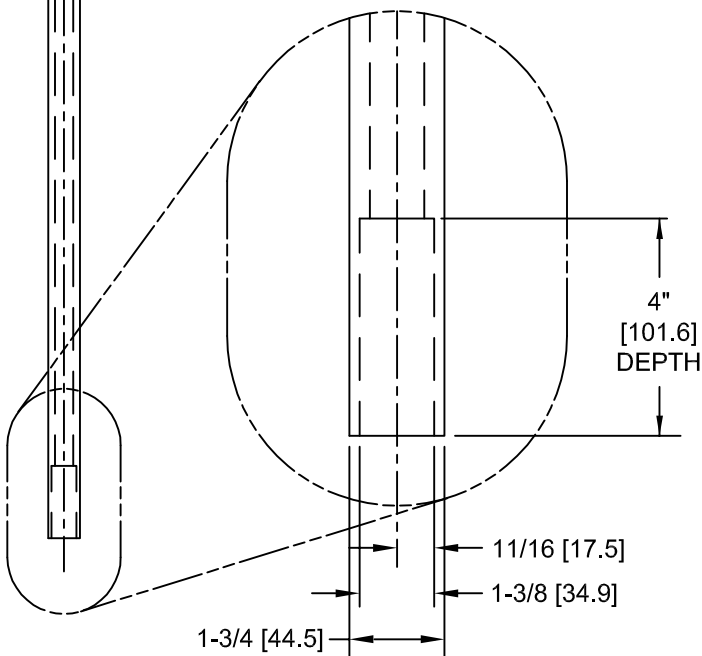

HORIZONTAL DEVICE ☒